Applications:

- Studio or location windows where light and exposure control is required.
- Movable panels for pick up shots and fast repositions.
- Day for Night alternative.

Standard Camera Filters



100mm x 100mm RoscoVIEW Filter.



139mm RoscoVIEW Filter.

- Servo-controlled camera filter in development.
- Custom camera filter sizes special order.

RoscoVIEW Film

- Custom film sizes special order.
- 1.42m x 2.44m rolls





Variable Intensity and Exposure control for Windows



www.rosco.com

Kangley Bridge Road
Sydenham
London SE26 5AQ
Tel: +44 (0)20 8659 2300 Fax: +44 (0)20 8659 3153
E-mail: sales@rosco-europe.com

Also in: New York, Hollywood, Toronto, Madrid, São Paulo and Sydney





RoscoVIEW System

The RoscoVIEW is comprised of two separate components:


- 1) RoscoVIEW Film for the window.
- 2) RoscoVIEW Filter for the camera.

When utilized together, you are able to instantly control 100% of exterior brightness as seen through windows without effecting the lighting and exposure within the studio.

Features:


- Optically Clear, wide width, high transmission film.
- Neutral grey.
- UV Resistant.
- Neutral Density equivalent: less than 1 stop at 0° linear.
- Near total blackout at 90° cross polarization.
- 1.42m x 2.44m rolls.
- Also available 1.42m wide x linear metre for custom sizes.



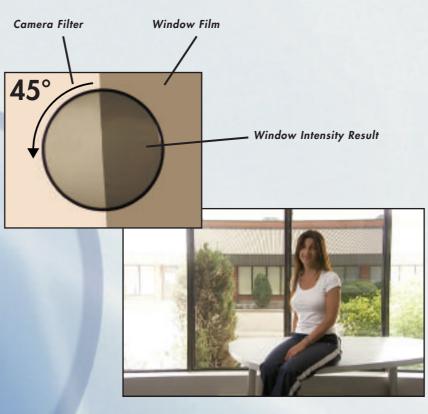

Benefits:

- You can instantly compensate for changes in the daylight exposure as seen through the windows.
- Reduce studio down-time, no more change out of filter, increase shooting time.
- Great for areas where it is difficult to re-apply filter regularly.
- More economical for larger window surfaces.
- Any size window can be accommodated by seaming two or more panels together.
- RoscoVIEW Film can be mounted in frames or can be incorporated on the RoscoShade™ system.

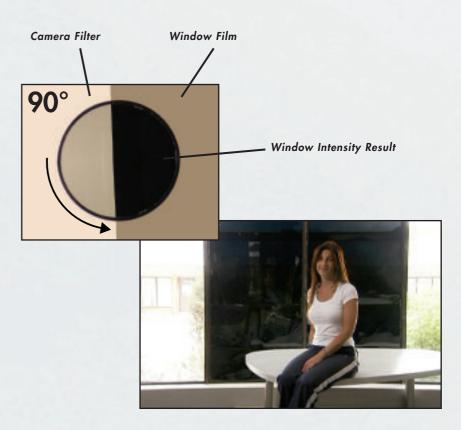

To view our demo video, please visit: